


Morse taper  
Cono Morse 莫氏銜刀

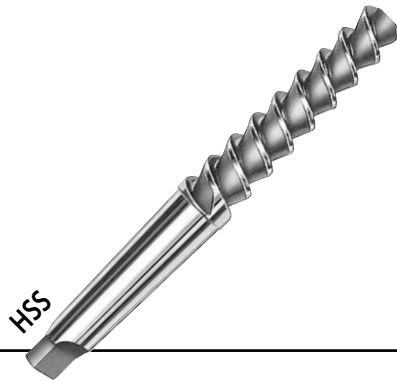



DIN 1895-D

| Reamer for MT N°<br>Esc. para CM N°<br>莫氏銜柄銜刀 N° | L   | ℓ   | MORSE<br>N° | magafor<br>780 |
|--|-----|-----|-------------|----------------|
| 0  | 137 | 61  | 1           | € •            |
| 1  | 142 | 66  | 1           | •              |
| 2  | 173 | 79  | 2           | •              |
| 3  | 212 | 96  | 3           | •              |
| 4  | 263 | 119 | 4           | •              |
| 5  | 331 | 150 | 5           | •              |

## MACHINE REAMERS FOR MORSE TAPER HOLES

## ESCARIADORES MÁQUINA PARA CONOS MORSE

機用銜刀  
莫氏銜柄

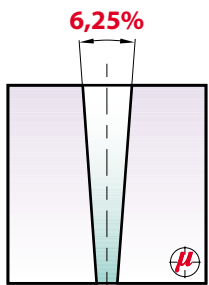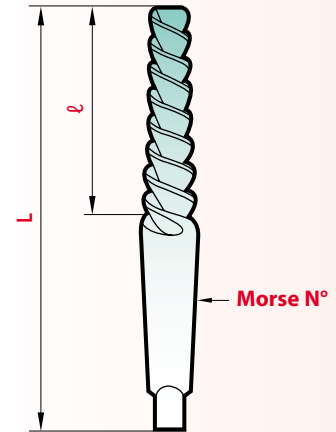

TAPER 6,25% 1:16  
CONICIDAD 銜度



## 1:16 GAS TAPER HAND REAMER

## NPT - NPTF

## ESCARIADORES MANO CÓNICOS GAS 6,25%

1:16 GAS  
銜度手用銜刀

| Ø<br>Nominal | d    | D    | L   | ℓ  | d2   | magafor<br>785 |
|--------------|------|------|-----|----|------|----------------|
| 1/8"         | 7,9  | 9,2  | 59  | 22 | 8    | € •            |
| 1/4"         | 10,7 | 12,1 | 67  | 23 | 10   | •              |
| 3/8"         | 14,0 | 15,6 | 75  | 26 | 12,5 | •              |
| 1/2"         | 17,2 | 19,3 | 87  | 34 | 16   | •              |
| 3/4"         | 22,7 | 24,8 | 96  | 34 | 20   | •              |
| 1"           | 28,4 | 30,8 | 109 | 39 | 25   | •              |

